


液压类电磁阀线圈

Hydraulic Solenoid Coil



产品型号 / Coil type.:13373

产品编号 / Code no.:BRS-C018

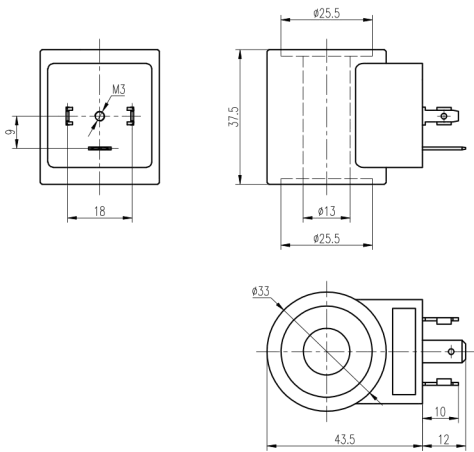

技术参数 /Technical Data

标称电压 Standard Voltage	DC:12V/24V; AC:24V/220V/380V (or RAC)
电压范围 Voltage range	DC $\pm$ 10%; AC -15%~+10%
额定功率 Rated Power	AC:15VA/20VA; DC:18W, others on request 其它可定制
工作时间 Duty Cycle	ED100% (continuous)

保护等级 Protection degree	IP65(EN60529)
绝缘等级 Coil Insulation	Class H
环境温度 Ambient temperature	-20 $^{\circ}$ C~+50 $^{\circ}$ C
工作频率 Frequency	50/ 60 HZ

主要结构 /General Construction

骨架材料 Bobbin material	PBT/PA66/PPS/PET
铜线等级 Coil wire	Class F wire,-155 $^{\circ}$ C ; Class H wire,- 200 $^{\circ}$ C(IEC317-8)
支架 Magnetic yoke	Made by low carbon iron 高导磁低碳钢
封塑材料 Encapsulation material	PA66 30% fiberglass 热塑性塑料 thermoplastic material

接电方式 /Electrical Connections

插脚式 DIN43650A spade plug

应用 /Application

适用于液压电磁阀。
Suitable for hydraulic system solenoid valves.